



Website: www.displaytech-us.com

Embedded Demonstration Board Product Specification

EMB024TFTDEMO

2.4" Color TFT Display Demonstration Board

Table of Contents

| | |
|--|----------|
| 1. INTRODUCTION | 3 |
| 2. GENERAL SPECIFICATIONS | 3 |
| 3. MECHANICAL DRAWING | 4 |
| 4. EXAMPLE FIRMWARE | 5 |
| 4.1. PROGRAMMING..... | 6 |


1. Introduction

The Displaytech EMB024TFTDEMO is a demonstration and development board for the Displaytech DT024BTFT 2.4" color TFT display. The display is controlled by a Microchip PIC24FJ256DA210 microcontroller with integrated graphics controller. Furthermore, the demonstration board includes on-board external SRAM for extra frame-buffer memory as well as SPI flash for storing fonts and images.


2. General Specifications

| Item | Specification | Unit |
|-------------------------------------|----------------------|-------------|
| LCD Resolution (Horizontal) | 240 | Line |
| LCD Resolution (Vertical) | 320 | Line |
| PCB Size (Horizontal) | 2.72 | Inch |
| PCB Size (Vertical) | 2.75 | Inch |
| Interface | USB and PICKit | --- |
| TFT Driver IC | Ilitek ILI9340 | --- |
| Microcontroller/Graphics Controller | PIC24FJ256DA210 | --- |
| SRAM Size | 512 | KB |
| External SPI Flash Size | 2 | MB |
| Power Supply | 5 (from USB) | V |

3. Mechanical Drawing

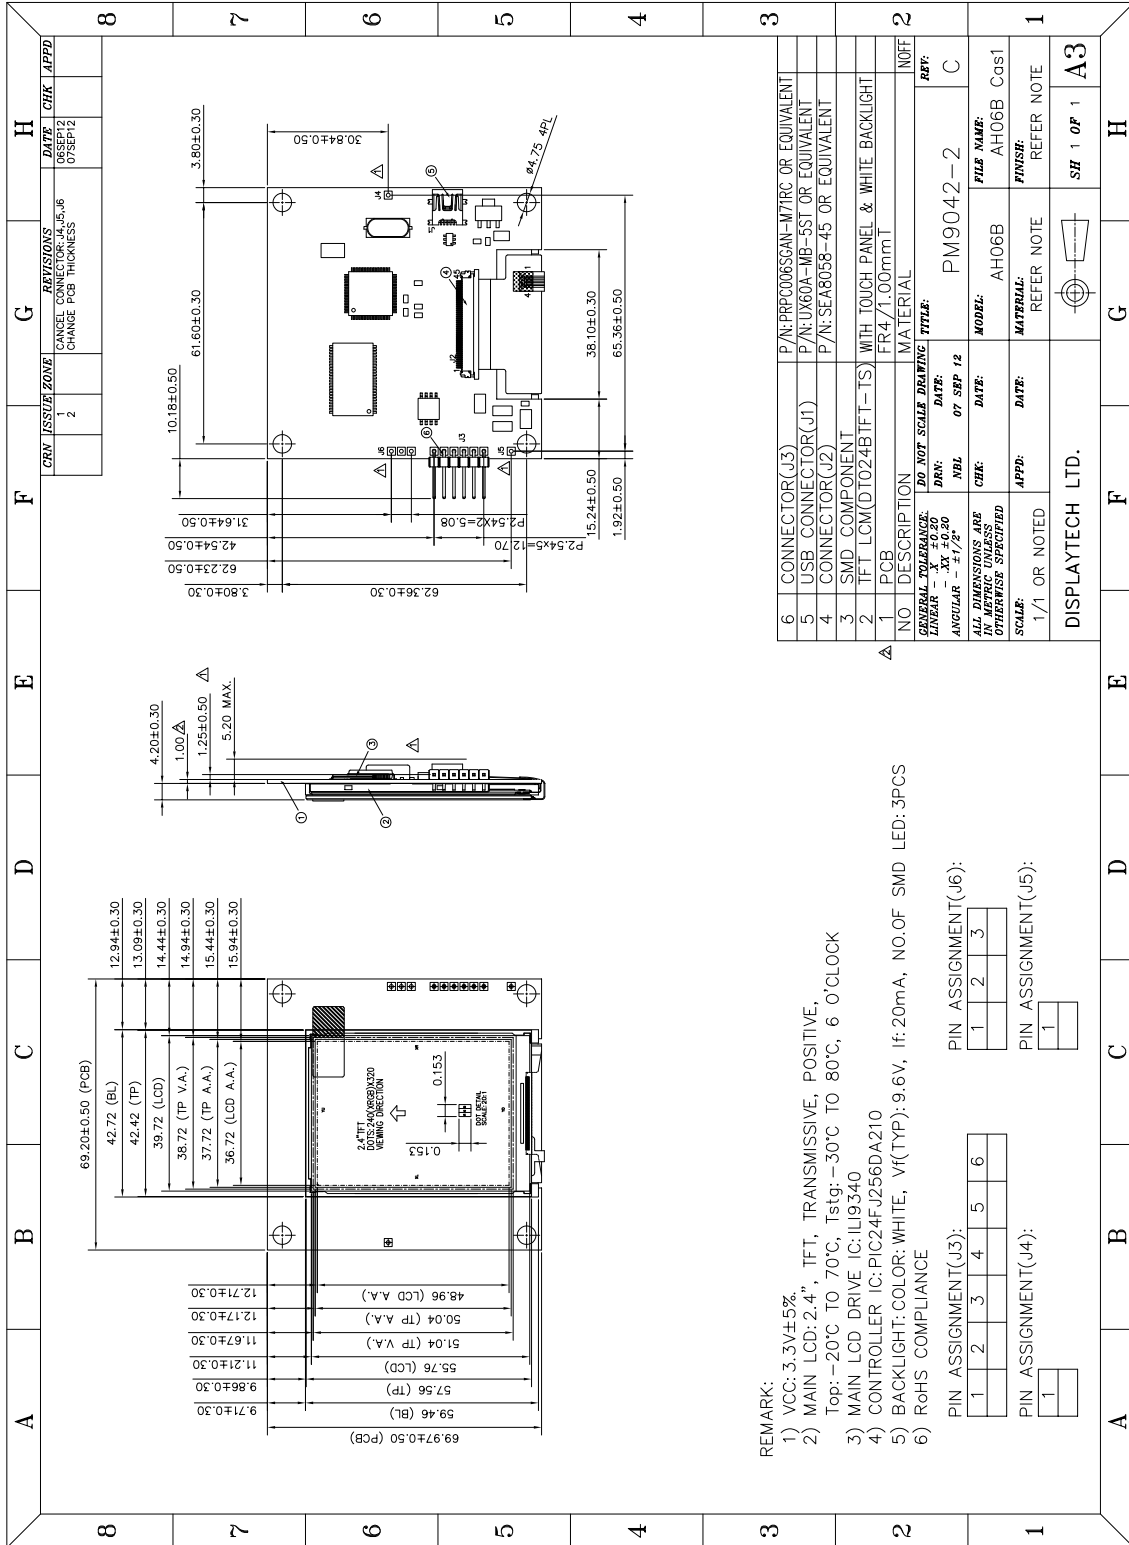

4. Schematic

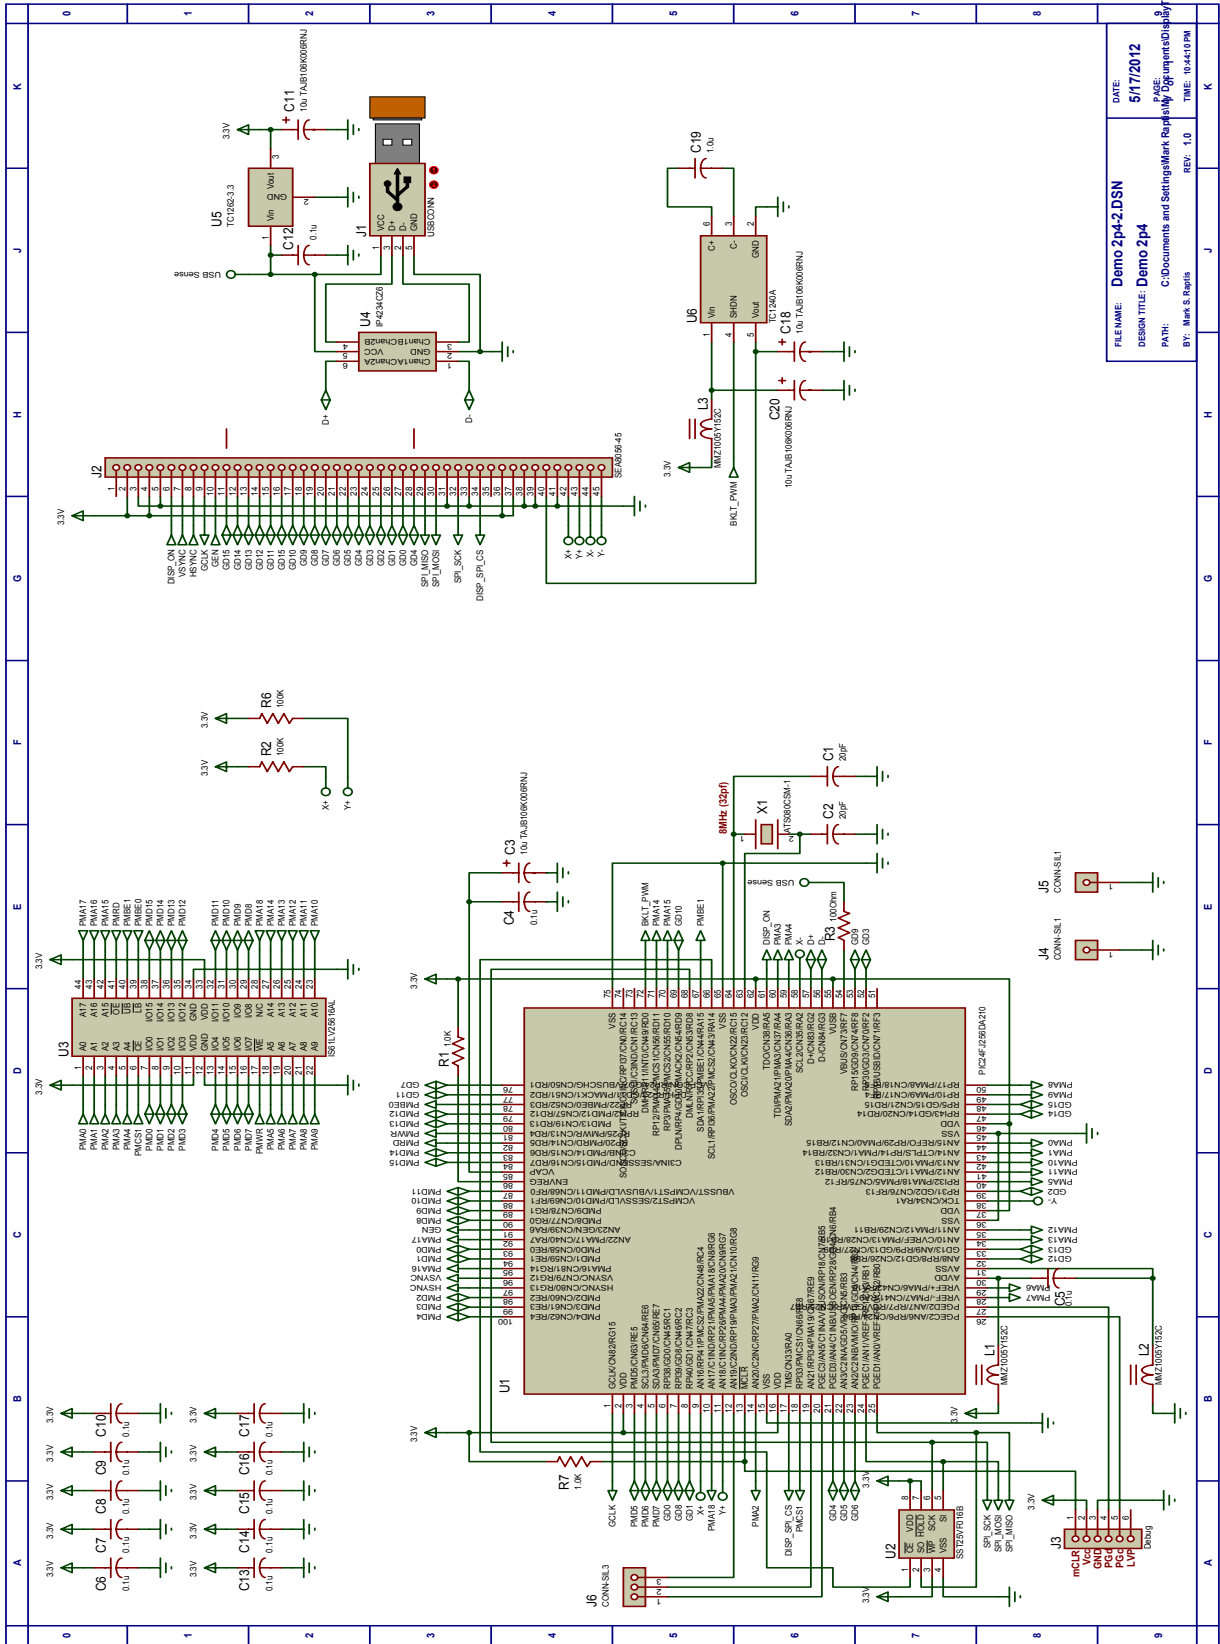

| | |
|--|-------------------|
| FILENAME: Demo 2p4-2.DSN | DATE: 5/17/2012 |
| DESIGN TITLE: Demo 2p4 | PAGE: 1 |
| PATH: C:\Documents and Settings\Mark Reilly\My Documents\Display | REV: 1.0 |
| BY: Mark S. Reilly | TIME: 10:41:09 AM |

5. Example Firmware

Example firmware running the Microchip Graphics Object Layer demonstration can be obtained from the Displaytech forum, at:

https://www.dropbox.com/s/bhdsbfcwqc780gm/SEA_EMB024TFTDEMO_FW_SRC_REV1.0.zip

Note: Microchip's MPLABX IDE and X16 compiler will be required to run the demo. Both are available at <http://www.microchip.com>.

5.1. Programming

To program the EMB024TFTDEMO, connect a Microchip Pickit3 programmer (available at <http://www.microchipdirect.com>) to the 6-pin header and the supplied USB cable to the USB-Mini connector.

Open the firmware package in MPLAB and build the project in release mode. Select the PICKit3 as the programmer and program the device.